

PRODUCT CATALOGUE

#### INTRODUCTION

# Welcome to Fuji Spray Auto™

Building on a foundation of 35+ years of spray expertise, Fuji Spray Auto features compressor spray guns that align with the Fuji Spray legacy of excellence, while offering the collision repair and car-refinishing industries high-performance and versatility at a competitive price.

Fuji Spray Auto is committed to delivering spray professionals the optimal combination of comfort and efficiency, reducing time per job in the booth and maximizing material savings.

Fuji Spray Auto is a division of Fuji Spray, a Canadian-based designer and manufacturer of exceptional spray equipment used around the world. Fuji Spray's best-in-class spray equipment delivers a perfect finish every time for a wide range of finishing industries, including automotive, woodworking, resurfacing and sunless tanning. This diverse experience is backed by unparalleled customer service, which has made Fuji Spray a leader in the global spray equipment industry.

### THE PERFECT FINISH STARTS WITH FUJI SPRAY®

At Fuji Spray, we care about the finish, and we start by focusing on the customer experience.

We care about making top-of-the-line, easy to use spray system that deliver a perfect finish every time. Our products are used for a wide range of finishing industries, including woodworking, automotive refinishing, marine, bathtub & kitchen resurfacing, and sunless tanning.

We care about your total satisfaction - in our products and our customer service. We provide training, product support and helpful insights that will help you achieve the best results with our equipment.

You're part of the Fuji Spray family and we want to help you finish strong.

Fuji Spray Auto

1

# FUJI SPRAY AUTO CATALOGUE

# Index

Introduction	1
VALOR Series	3
VALOR Series Parts Diagram	8
V8 Series	11
V8 Series Parts Diagram	18
PRIMIS P30	21
PRIMIS P30 Parts Diagram	24
X Series	27
MPX-30 Parts Diagram	30
LX-20 Parts Diagram	34



VALOR SERIES

VALOR<sup>™</sup> M100 VALOR<sup>™</sup> H100



#### VALOR SERIES

# VALOR™ M100 CLEAR MID-PRESSURE SPRAY GUN

#### **SPECIFICATIONS**

Operating range: 9-29 PSI

· Air consumption: 10.8 CFM

· Air inlet size: 1/4" PF

· Air supply hose: 6.5 x 10mm (5/16" ID)

· Fluid coupler: 3/8" PF

· Gun weight (without cup): 435g (0.96 lbs)

Designed with Fuji Spray<sup>®</sup>'s advanced Mid-Pressure technology, the VALOR™ M100 CLEAR sets a new benchmark in professional refinishing.

Purpose-built for clear coat applications, this lightweight spray gun combines effortless precision with unparalleled user comfort. Its ergonomic design reduces fatique, while the intuitive features streamline operation, making it ideal for high-production environments.

- · Lightweight and balanced design
- · Forged aluminum gun body with anodized internals
- · Precise side-mounted fan pattern control with clear markings
- · High transfer efficiency means less overspray and increased savings
- · Produces up to 320mm (12.6 inches) fan pattern
- · Fewer internal components for easy maintenance
- · Tip sizes ranging from 1.2mm to 2.1mm
- · Compatible with 3M PPS and other major cup systems

#### VALOR™ M100 VARIATIONS

#8266M	VALOR M100 Spray Gun
#8266M-A	VALOR M100 Spray Gun with 600cc Aluminum Cup
#8266M-N	VALOR M100 Spray Gun with 600cc Nylon Cup

#### AIR CAP SET SIZES

#8200M-1.2	Air Cap Set (1.2mm)
#8200M-1.3	Air Cap Set (1.3mm) (Standard)
#8200M-1.4	Air Cap Set (1.4mm)
#8200M-1.7	Air Cap Set (1.7mm)
#8200M-2.1	Air Cap Set (2.1mm)

#### APPLICATION TYPE

· Clear Coat Application

#### PAINT CUP ADAPTERS

3M <sup>™</sup>	S15
DeKups <sup>®</sup>	DPC-31
Colad 	A14 
RPS <sup>®</sup>	3

#### ACCESSORIES

#6840	600cc Nylon Gravity Cup Assembly
#6841	600cc Aluminum  Gravity Cup Assembly
#6380	Analog Regulator Gauge
#6873	Digital Regulator Gauge



#### VALOR SERIES

# VALOR™ H100 BASE HVLP SPRAY GUN

#### **SPECIFICATIONS**

· Operating range: 9-29 PSI

· Air consumption: 11.5 CFM

· Air inlet size: 1/4" PF

· Air supply hose: 6.5 x 10mm (5/16" ID)

· Fluid coupler: 3/8" PF

· Gun weight (without cup): 435g (0.96 lbs)

Purpose-built for base coat applications, the VALOR H100 BASE offers precision, speed, and consistent coverage—perfect for refinish professionals who demand efficiency without compromising on quality.

With a lightweight, ergonomic build and intuitive controls, the H100 BASE makes long spray sessions more comfortable and productive. Designed for high-production environments, the VALOR H100 BASE helps you move faster while maintaining professional results.

- · Lightweight and balanced design
- · Forged aluminum gun body with anodized internals
- · Precise side-mounted fan pattern control with clear markings
- · High transfer efficiency means less overspray and increased savings
- · Produces up to 320mm (12.6 inches) fan pattern
- · Fewer internal components for easy maintenance
- · Tip sizes ranging from 1.3mm to 1.7mm
- · Compatible with 3M PPS and other major cup systems

#### VALOR™ H100 VARIATIONS

#8277H	VALOR H100 Spray Gun
#8277H-A	VALOR H100 Spray Gun with 600cc Aluminum Cup
#8277H-N	VALOR H100 Spray Gun with 600cc Nylon Cup

#### AIR CAP SET SIZES

#8350H-1.3	Air Cap Set (1.3mm)
#8350H-1.4	Air Cap Set (1.4mm) (Standard)
#8350H-1.7	Air Cap Set (1.7mm)


#### APPLICATION TYPE

Base Coat Application

#### PAINT CUP ADAPTERS

3M™	S15
DeKups <sup>®</sup>	DPC-31
Colad	A14
RPS®	3
ACCESSO	RIES
#6840	600cc Nylon Gravity Cup Assembly
#6841	600cc Aluminum Gravity Cup Assembly
#6380	Analog Regulator Gauge
#6873	Digital Regulator Gauge

# **VALOR Series**

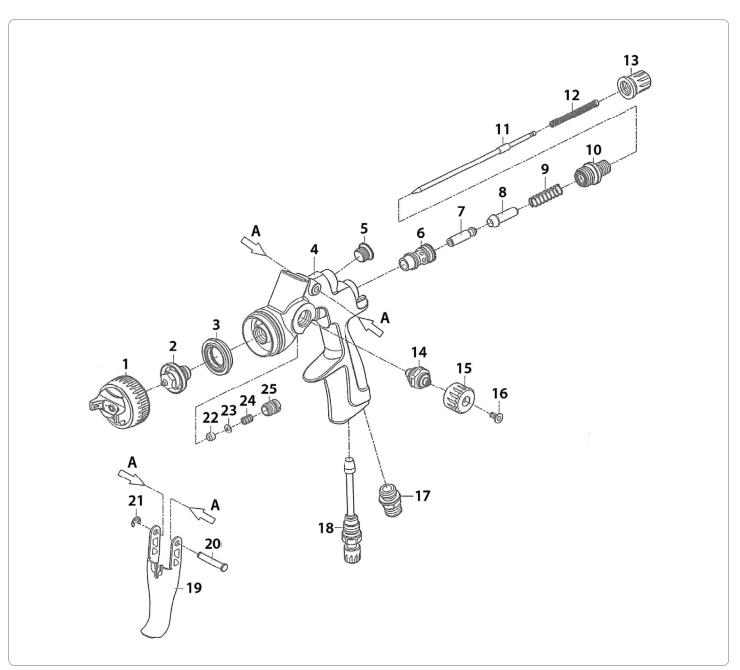

# **VALOR Series**

ITEM	PART	NAME	NOTE
1	-	Air Cap with Collar	
2	-	Fluid Nozzle	
3	8303	Air Distributor	
4	-	Gun Body	X
5	8305	Rear Barrel Plug with Seal	X
6	-	Spindle Valve Housing	X
7	8307	Spindle Valve Bushing	X
8	6809	Spindle Valve	X
9	6810	Spindle Valve Spring	X
10	8310	Fluid Screw Nut	X
11	-	Needle	
12	-	Needle Spring	
13	8313	Fluid Control	
14	8304	Fan Control Assembly	X
15	8304	Control Knob	X
16	8304	Screw	X
17	-	Air Inlet	X
18	-	Air Control Assembly	X
19	8319	Trigger	
20	8320	Trigger Pin	
21	8321	Trigger Retaining Ring	
22	8326	Needle Seal	
23	8326	Washer	
24	8326	Spring	
25	8326	Needle Packing Seat	

#### NOTE

(X) Part not to be removed



V8 SERIES

MP-V8 STEALTH<sup>™</sup>
MP-V8<sup>™</sup>
H-V8<sup>™</sup>



#### V8 SERIES

# LIMITED EDITION MP-V8 STEALTH™ MID-PRESSURE SPRAY GUN

#### SPECIFICATIONS

Operating range: 9-35 PSI

Air consumption: 12.2 CFM

Air inlet size: 1/4" BSP + NPS

· Air supply hose: 6.5 x 10mm

· Fluid coupler: 3/8" PF

Gun weight (without cup): 521q (1.15 lbs)

Designed with Fuji Spray<sup>®</sup>'s Mid-Pressure technology, the MP-V8 STEALTH<sup>TM</sup> is the superior choice for professional clear coat application. The MP-V8<sup>TM</sup> STEALTH features a side-mounted fan pattern control allowing you to precisely set your fan width to match your project size.

Suitable for high production facilities, the MP-V8™ STEALTH™ features a new sleek black forged aluminum spray gun body with anodized fluid passages for use with waterborne or solvent-based coatings.

- · Precise side-mounted fan pattern control reducing overspray and waste
- · Forged aluminum gun body with anodized internals
- · High transfer efficiency means less overspray and increased savings
- Produces up to 315mm (12.4 inches) fan pattern
- · Fewer internal components for easy maintenance
- · Tip sizes ranging from 1.2mm to 2.2mm
- South Coast Air Quality Management District (SCAQMD) certified

#### MP-V8 STEALTH™ VARIATIONS

#6876-MP-V8	MP-V8 STEALTH Spray Gun
#6876-MP-V8-A	MP-V8 STEALTH Spray Gun with 600cc Aluminum Cup
#6876-MP-V8-N	MP-V8 STEALTH Spray Gun with 600cc Nylon

#### AIR CAP SET SIZES

#6800MP-V8-1.2	Air Cap Set (1.2mm)
#6800MP-V8-1.3	Air Cap Set (1.3mm) (Standard)
#6800MP-V8-1.4	Air Cap Set (1.4mm)
#6800MP-V8-1.7	Air Cap Set (1.7mm)
#6800MP-V8-2.0	Air Cap Set (2.0mm)
#6800MP-V8-2.2	Air Cap Set (2.2mm)

#### APPLICATION TYPE

· Clear Coat Application

#### PAINT CUP ADAPTERS

3M™	S15
DeKups <sup>®</sup>	DPC-31
Colad	A14
RPS <sup>®</sup>	3

#### ACCESSORIES

#6840	600cc Nylon Gravity Cup Assembly
#6841	600cc Aluminum Gravity Cup Assembly
#6380	Analog Regulator Gauge
#6873	Digital Regulator Gauge
#6882	Rebuild Kit



#### V8 SERIES

# MP-V8<sup>™</sup> MID-PRESSURE SPRAY GUN

#### SPECIFICATIONS

Operating range: 9-35 PSI

· Air consumption: 12.2 CFM

· Air inlet size: 1/4" BSP + NPS

· Air supply hose: 6.5 x 10mm

Fluid coupler: 3/8" PF

• Gun weight (without cup): 521g (1.15 lbs)

Designed with Fuji Spray  $^{\circ}$ 's Mid-Pressure technology, the MP-V8 $^{\circ}$  is the superior choice for professional clear coat application. The MP-V8 $^{\circ}$  features a side-mounted fan pattern control allowing you to precisely set your fan width to match your project size.

Suitable for high volume facilities, the MP-V8 $^{\text{\tiny{M}}}$  has a forged aluminum spray gun body with anodized fluid passages for use with waterborne or solvent-based coatings.

- · Precise side-mounted fan pattern control reducing overspray and waste
- · Forged aluminum gun body with anodized internals
- · High transfer efficiency means less overspray and increased savings
- · Produces up to 315mm (12.4 inches) fan pattern
- · Fewer internal components for easy maintenance
- · Tip sizes ranging from 1.2mm to 2.2mm
- · South Coast Air Quality Management District (SCAQMD) certified

#### MP-V8™ VARIATIONS

#6852G-MP-V8	MP-V8 Spray Gun
#6852G-MP-V8-A	MP-V8 Spray Gun with 600cc Aluminum Cup
#6852G-MP-V8-N	MP-V8 Spray Gun with 600cc Nylon Cup
#6954G-MP-V8	MP-V8 Spray Gun with 360° Swivel Fitting

#### AIR CAP SET SIZES

#6800MP-V8-1.2	Air Cap Set (1.2mm)
#6800MP-V8-1.3	Air Cap Set (1.3mm) (Standard)
#6800MP-V8-1.4	Air Cap Set (1.4mm)
#6800MP-V8-1.7	Air Cap Set (1.7mm)
#6800MP-V8-2.0	Air Cap Set (2.0mm)
#6800MP-V8-2.2	Air Cap Set (2.2mm)

#### APPLICATION TYPE

· Clear Coat Application

#### PAINT CUP ADAPTERS

3M™	S15
DeKups®	DPC-31
Colad	A14
RPS®	3

#### ACCESSORIES

#6840	600cc Nylon Gravity Cup Assembly
#6841	600cc Aluminum Gravity Cup Assembly
#6380	Analog Regulator Gauge
#6873	Digital Regulator Gauge
#6882	Rebuild Kit



#### V8 SERIES

# H-V8<sup>™</sup> HVLP SPRAY GUN

#### **SPECIFICATIONS**

· Operating range: 9-28 PSI

· Air consumption: 14.7 CFM

Air inlet size: 1/4" BSP + NPS

· Air supply hose: 6.5 x 10mm

Fluid coupler: 3/8" PF

Gun weight (without cup): 521g (1.15 lbs)

Best suited for base and clear coat applications, the  $H-V8^{T}$  has a precise side-mounted fan pattern control capable of producing up to 325mm (12.8 inches) wide fan pattern, providing the coverage you need to get the job done.

The H-V8<sup>™</sup> has few internal components, forged aluminum spray gun body with anodized fluid passages, and an optimized HVLP air cap resulting in a soft and consistent spray pattern.

- · Precise side-mounted fan pattern control reducing overspray and waste
- · Forged aluminum gun body with anodized internals
- · Optimized HVLP air cap for a soft spray pattern
- · High transfer efficiency means less overspray and increased savings
- · Produces up to 325mm (12.8 inches) fan pattern
- · Fewer internal components for easy maintenance
- Tip sizes ranging from 1.2mm to 2.2mm

#### H-V8™ VARIATIONS

#6863G-H-V8	H-V8 Spray Gun
#6863G-H-V8-A	H-V8 Spray Gun with 600cc Aluminum Cup
#6863G-MP-V8-N	H-V8 Spray Gun with 600cc Nylon Cup
#6965G-H-V8	H-V8 Spray Gun with 360° Swivel Fitting

#### AIR CAP SET SIZES

#6890H-V8-1.2	Air Cap Set (1.2mm)
#6890H-V8-1.3	Air Cap Set (1.3mm)
#6890H-V8-1.4	Air Cap Set (1.4mm) (Standard)
#6890H-V8-1.7	Air Cap Set (1.7mm)
#6890H-V8-2.0	Air Cap Set (2.0mm)
#6890H-V8-2.2	Air Cap Set (2.2mm)

#### APPLICATION TYPE

· Base Coat Application


#### PAINT CUP ADAPTERS

3M™	S15
DeKups®	DPC-31
Colad	A14
RPS®	3

#### ACCESSORIES

#6840	600cc Nylon Gravity Cup Assembly
#6841	600cc Aluminum  Gravity Cup Assembly
#6380	Analog Regulator Gauge
#6873	Digital Regulator Gauge
#6882	Rebuild Kit

# **V8 Series**

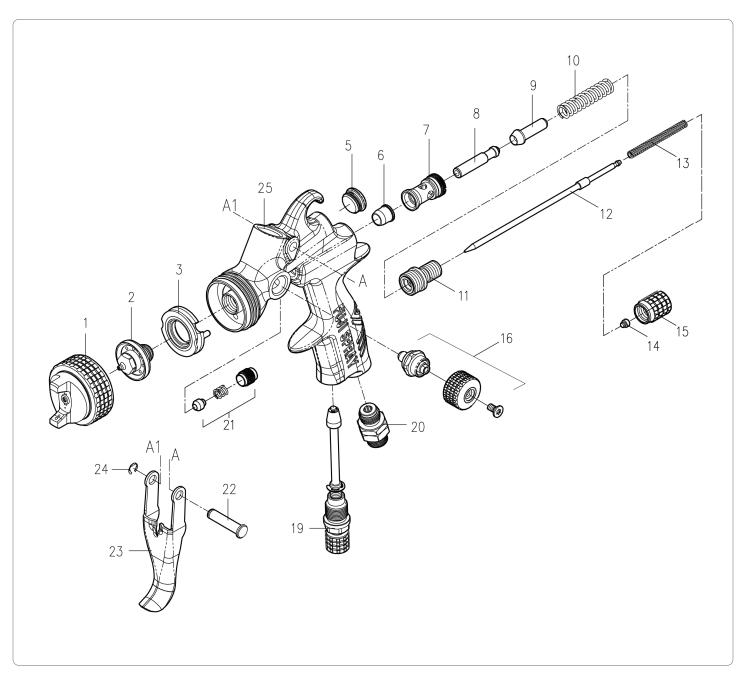

# **V8 Series**

ITEM	PART	NAME	NOTE
1	-	Air Cap with Collar	
2	-	Fluid Nozzle	
3	6803	Air Distributor	*
5	6805	Rear Barrel Plug with Seal	
6	-	Valve Seal	X
7	-	Spindle Valve Housing	Х
8	6808	Spindle Valve Bushing	*
9	6809	Spindle Valve	*
10	6810	Spindle Valve Spring	*
11	6811	Fluid Screw Nut	*
12	-	Needle	
13	6813	Needle Spring	*
14	6814	Needle Spring Cap	*
15	6815	Fluid Control Knob	*
16	6816	Fan Pattern Control Assembly	
19	6819	Air Control Assembly	
20	-	Air Inlet	X
21	6821	Needle Packing Assembly	*
22	6822	Trigger Pin	
23	6823	Trigger	
24	6824	Trigger Retaining Ring	
25	-	Fluid Coupler	X

#### NOTE

- (X) Part not to be removed
- (\*) Part available with Rebuild Kit (#6882)



PRIMER GUN

PRIMIS<sup>™</sup> P30



# PRIMIS<sup>™</sup> P30 PRIMER SPRAY GUN

#### **SPECIFICATIONS**

· Air supply pressure: 9-28 PSI (0.62-1.9 bar)

· Air consumption: 10.9 CFM

· Air inlet size: 1/4" PF

· Air supply hose: 6.5 x 10mm

Fluid coupler (gravity feed): 3/8" PF

Gun weight (without cup): 448g (0.987 lbs)

The PRIMIS™ P30 is Fuji Spray Auto's dedicated HVLP primer spray gun, designed for efficient application of primers, sealers, and fillers in collision repair. It delivers reliable atomization and consistent coverage, making it an ideal choice for shops seeking a dependable, no-fuss tool for foundational coating stages.

Crafted with an aluminum body and copper fluid passages, the P30 is lightweight, easy to maintain, and built for repeated daily use. With rear-mounted fan and fluid controls for convenient adjustments and an ergonomic design for user comfort, the PRIMIS™ P30 offers trusted performance where it counts.

- · Rear-mounted controls for easy adjustment
- · Streamlined internal design for simplified maintenance
- Produces up to 310mm (12.2 inches) fan pattern
- · Compatible with waterborne or solvent-based coatings
- Optimized tip range for primer & sealer applications 1.6 to 2.2mm
- · 12 month warranty

#### PRIMIS™ VARIATIONS

#7425	PRIMIS Spray Gun with 600cc Nylon Cup

#### AIR CAP SET SIZES

#7420-1.6	Air Cap Set (1.6mm)
#7420-1.8	Air Cap Set (1.8mm) (Standard)
#7420-2.0	Air Cap Set (2.0mm)
#7420-2.2	Air Cap Set (2.2mm)


#### APPLICATION TYPE

· Primer/Sealer Application & General Purpose

#### PAINT CUP ADAPTERS

3M™	S2
DeKups <sup>®</sup>	DPC-11
Colad	A09
ACCESS	ORIES
#6360	600cc Nylon Cup Assembly
#7495	Air Distributor with
#6380	Analog Regulator Gauge
#6873	Digital Regulator

# PRIMIS<sup>™</sup> P30

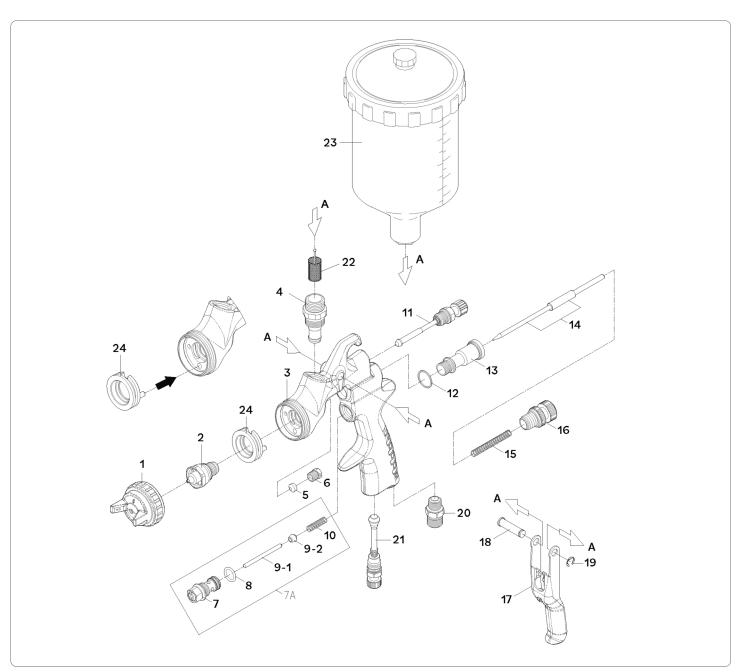

# PRIMIS<sup>™</sup> P30

ITEM	PART	NAME	NOTE
1	7420	Air Cap	
2	7420	Fluid Nozzle	
3	7475	Gun Body	X
4	7476	Fluid Coupler	X
5	7477	Needle Packing	
6	7478	Needle Packing Nut	
7A	7479	Trigger Valve Assembly	X
7	7480	Trigger Valve Seat Set	X
8	7481	Trigger Valve O-Ring	X
9-1	7482	Trigger Valve Steam	X
9-1	7483	Trigger Valve Seat	X
10	7484	Trigger Valve Spring	X
11	7485	Fan Pattern Assembly	X
12	7486	Fluid Screw Gasket	X
13	7487	Fluid Screw Nut	X
14	7420	Needle	
15	7488	Needle Spring	
16	7489	Fluid Control	
17	7490	Trigger	
18	7491	Trigger Pin	
19	7492	Trigger Retaining Ring	
20	7493	Air Inlet	X
21	7494	Air Control Valve	X
22	9030	Inline Barrel Strainer	
23	6360	600cc Nylon Cup	
24	7495	Air Distributor with Seal	

#### NOTE

(X) Part not to be removed



X SERIES

MPX-30<sup>™</sup> LX-20<sup>™</sup>



#### X SERIES

# MPX-30<sup>™</sup> MID-PRESSURE SPRAY GUN

#### **SPECIFICATIONS**

Air supply pressure: 36 PSI at gun inlet (2.5 bar)

· Air consumption: 13.8 CFM

Air inlet size: 1/4" BSP + NPS

· Air supply hose: 5/16" ID

Fluid coupler (gravity feed): M16 x 1.5P

· Gun weight (without cup): 502g (1.1 lbs)

With a handle ergonomically designed to reduce user fatigue, the MPX- $30^{\circ}$  provides increased application speed without sacrificing performance. Intuitive, lightweight and easy to maintain, the MPX- $30^{\circ}$ s nearly  $13^{\circ}$  wide fan pattern, paired with a precise sidemounted fan pattern control, minimizes overspray and reduces waste.

The MPX-30<sup>™</sup> features optimized internal air passages to provide increased atomizing air for modern high-solid coatings.

- · High transfer efficiency means less overspray and increased savings
- · Precise side mounted fan pattern control reduces overspray and waste
- · Produces up to 330mm (13 inches) fan pattern
- · Optimized air cap design results in soft spray pattern and outstanding atomization
- · VOC compliant
- · 100% stainless steel fluid passages and a wide offering of air cap set sizes
- · MPX-30<sup>™</sup> kits include aircap sets and regulator
- · Also available in a siphon-feed variation
- South Coast Air Quality Management District (SCAQMD) certified

#### MPX-30™ VARIATIONS

#6355G-MP-C-14K	MPX-30 Gravity with 600cc Nylon Cup + Extra 1.3mm
#6355G-MP-N-14K	MPX-30 Gravity + Extra 1.3mm (No cup)

#### AIR CAP SET SIZES

#6300MPX-1.0	Air Cap Set (1.0mm)
#6300MPX-1.3	Air Cap Set (1.3mm)
#6300MPX-1.4	Air Cap Set (1.4mm) (Standard)
#6300MPX-1.7	Air Cap Set (1.7mm)
#6300MPX-2.0	Air Cap Set (2.0mm)

#### APPLICATION TYPE


· Clear Coat Application

#### PAINT CUP ADAPTERS

3M™	S2
DeKups®	DPC-11
Colad	A09
RPS <sup>®</sup>	1
ACCESSO	RIES

#6360	600cc Gravity Cup Assembly
#6375	3oz Gravity Cup Assembly
#8081-3	Gaskets (3oz Cup) (3 pack)
#6380	Analog Regulator Gauge
#6873	Digital Regulator Gauge
#6882	Rebuild Kit

# **MPX-30**<sup>™</sup>

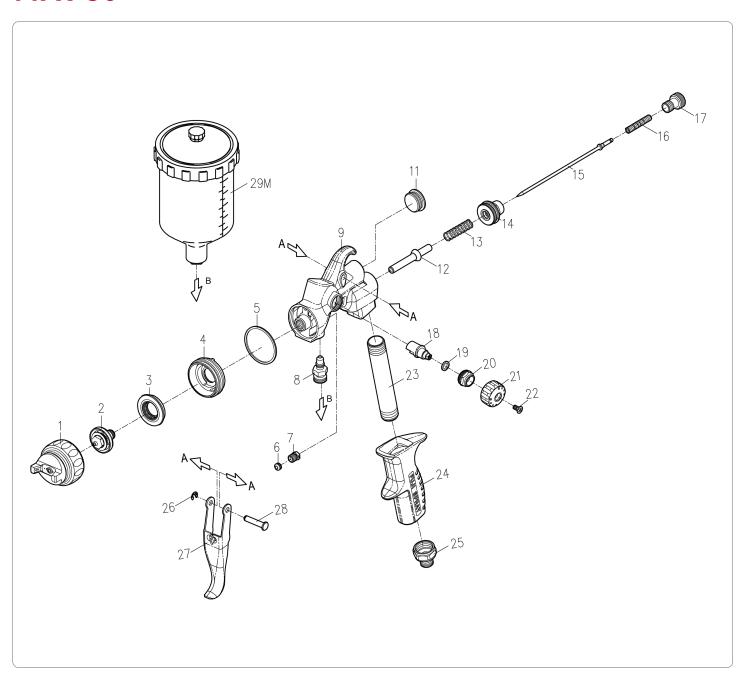

# **MPX-30**<sup>™</sup>

ITEM	PART	NAME	NOTE
1	-	Air Cap & Collar	*
2	-	Fluid Nozzle	*
3	6303	Air Distributor	**
4	6204	Air Diffuser	**
5	6305	Air Diffuser Seal	**
6	6306	Needle Packing	**
7	6307	Needle Packing Nut	**
12	6312	Spindle Valve	**
13	6313	Valve Spring	**
14	6314	Fluid Screw Nut	**
15	-	Needle	*
16	6316	Needle Spring	**
17	6217	Fluid Control Knob	**
18	6318	Air Deflector	***
19	6319	Deflector Seal	***
20	6320	Control Knob Nut	***
21	6221	Pattern Control Knob	***
22	6322	Locking Screw	***
26	6326	Trigger Retaining Ring	
27	6327	Trigger	
28	6328	Trigger Pin	

#### NOTE

- (\*) Part only available together as a full Air Cap Set (#6300MPX-)
- (\*\*) Part available with Rebuild Kit (#6382)
- (\*\*\*) Part available in Pattern Control Assembly (#6383)



#### X SERIES

# LX-20<sup>™</sup> HVLP SPRAY GUN

#### **SPECIFICATIONS**

· Air supply pressure: 26 PSI at gun inlet (1.8 bar)

· Air consumption: 15.2 CFM

· Air inlet size: 1/4" BSP + NPS

· Air supply hose: 5/16" ID

Fluid coupler (gravity feed): M16 x 1.5P

Gun weight (without cup): 502g (1.1 lbs)

Featuring a nearly 13" wide fan pattern and an enhanced HVLP air cap design, the Fuji Spray $^{\circ}$  LX-20 $^{\circ}$  and its optimized air passages will decrease time in the spray booth and increase productivity. Easily adaptable to leading disposable cup systems, the LX-20 $^{\circ}$  is intuitive, lightweight and easy to maintain.

The LX-20<sup>™</sup> features a unique comfort grip that reduces operator fatigue, allowing users to spray for extended periods of time.

- · High transfer efficiency means less overspray and increased savings
- $\cdot$   $\;$  Precise side mounted fan pattern control reduces overspray and waste
- · Produces up to 330mm (13 inches) fan pattern
- · Optimized air cap design results in soft spray pattern and outstanding atomization
- · VOC compliant
- · 100% stainless steel fluid passages and a wide offering of air cap set sizes
- LX-20<sup>™</sup> kits include aircap sets and regulator
- · Also available in a bottom-feed variation

#### LX-20™ VARIATIONS

#6265G-LX-C-14K	LX-20 Gravity with 600cc Nylon Cup + Extra 1.2 and 1.7mm	
#6265G-LX-N-14K	LX-20 Gravity + Extra 1.2 and 1.7mm (No cup)	

#### AIR CAP SET SIZES

#6200LX-1.0	Air Cap Set (1.0mm)
#6200LX-1.2	Air Cap Set (1.2mm)
#6200LX-1.4	Air Cap Set (1.4mm) (Standard)
#6200LX-1.7	Air Cap Set (1.7mm)
#6200LX-2.0	Air Cap Set (2.0mm)

#### APPLICATION TYPE

Base Coat Application


#### PAINT CUP ADAPTERS

3M™	S2
DeKups <sup>®</sup>	DPC-11
Colad	A09
RPS®	1

#### ACCESSORIES

#6360	600cc Gravity Cup Assembly	
#6375	3oz Gravity Cup Assembly	
#8081-3	Gaskets (3oz Cup) (3 pack)	
#6380	Analog Regulator Gauge	
#6873	Digital Regulator Gauge	
#6382	Rebuild Kit	

# LX-20<sup>™</sup>

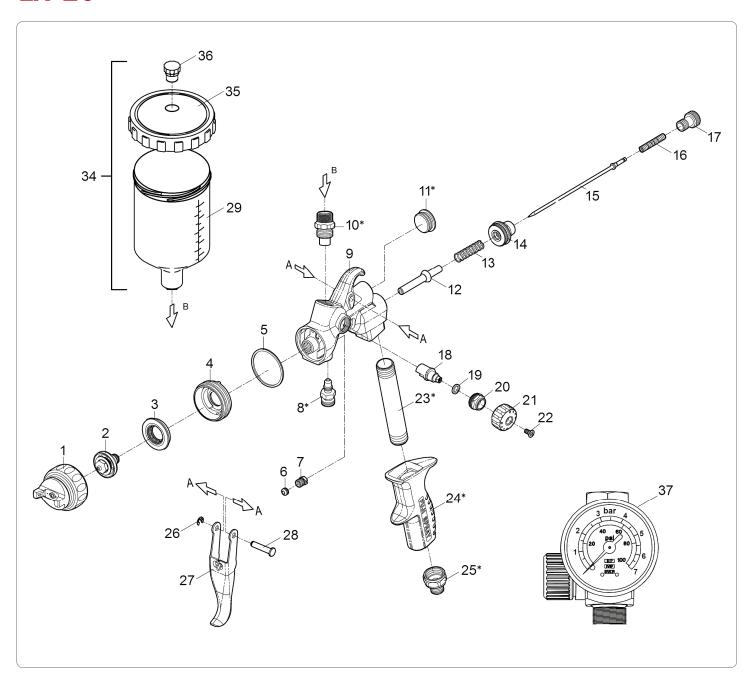

## LX-20<sup>™</sup>

ITEM	PART	NAME	NOTE	
1	-	Air Cap & Collar	*	
2	-	Fluid Nozzle	*	
3	6303	Air Distributor	**	
4	6204	Air Diffuser	**	
5	6305	Air Diffuser Seal	**	
6	6306	Needle Packing	**	
7	6307	Needle Packing Nut	**	
12	6312	Spindle Valve	**	
13	6313	Valve Spring	**	
14	6314	Fluid Screw Nut	**	
15	-	Needle	*	
16	6316	Needle Spring	**	
17	6217	Fluid Control Knob	**	
18	6318	Air Deflector	***	
19	6319	Deflector Seal	***	
20	6320	Control Knob Nut	***	
21	6221	Pattern Control Knob	***	
22	6322	Locking Screw	***	
26	6326	Trigger Retaining Ring		
27	6327	Trigger		
28	6328	Trigger Pin		

#### NOTE

- (\*) Part only available together as a full Air Cap Set (#6200LX-)
- (\*\*) Part available with Rebuild Kit (#6282)
- (\*\*\*) Part available in Pattern Control Assembly (#6283)

#### WE'RE HERE TO HELP

## **Contact Us**

#### FUJI INDUSTRIAL SPRAY EQUIPMENT LTD.



800 Alness Street Toronto, Ontario M3J 2H5 Canada



#### TALK TO US

1-800-650-0930 416-650-1430 support@fujispray.com



#### VISIT OUR WEBSITE

www.fujisprayauto.com



#### FOR DISTRIBUTION-RELATED INQUIRIES

sales@fujispray.com

# FUJISPRAY® AUTO

www.fujisprayauto.com